


Visual & Audible Reversing Sensor

Two options available:

SVS100VPS (for integration with compatible 100 Series monitors)

SVS100VPS.S (for stand alone applications, power supply included)

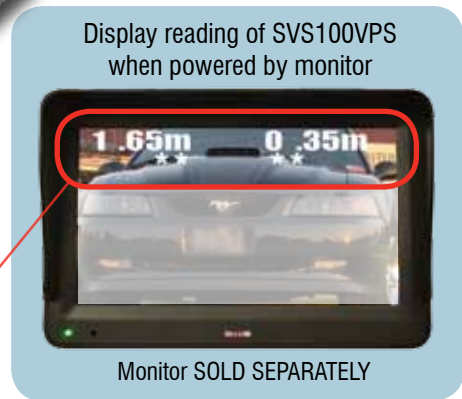

Independent display of distance from object

Product Information

- 4 x High-sensitivity ultrasonic detectors
- Automatically activates when reverse gear is engaged
- Includes: Buzzer, hole saw, connection cables and manual



Features

- **Real-time distance indication (displays actual distance to object on monitor)**
- **Compatible with SVS 100 Series monitors and backup cameras**



Hole saw included

Specifications

Number of Sensors	4
Colour of Sensors	Black
Ultrasonic Frequency	40KHz
Detecting Distance	0.30~2.50m (1ft 0inb~8ft 4in)
Best Detecting Distance	0.30~1.50m (1ft 0inb~5ft 0in)
Display Unit	Metric
Power Supply	DC 10-18V
Operating Temperature	-20°C ~ +70°C, RH 95% Max.
Storage Temperature	-40°C ~ +80°C, RH 95% Max.
Warranty	2 years
Camera Connection	Female 4 Pin
Monitor Output Connection	Male 4 Pin